



## Electrical Specifications

Module Type	DM395M10-54HBB DM395M10-54HBB-V		DM400M10-54HBB DM400M10-54HBB-V		DM405M10-54HBB DM405M10-54HBB-V		DM410M10-54HBB DM410M10-54HBB-V	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax/W)	395	299	400	303	405	307	410	311
Maximum Power Current (Imp/A)	12.94	10.25	13.03	10.32	13.11	10.40	13.20	10.47
Maximum Power Voltage (Vmp/V)	30.56	29.22	30.73	29.38	30.91	29.55	31.09	29.72
Short-circuit Current (Isc/A)	13.81	11.08	13.90	11.15	13.98	11.21	14.06	11.28
Open-circuit Voltage (Voc/V)	36.97	35.11	37.09	35.23	37.21	35.34	37.33	35.46
Module Efficiency STC (%)	20.23%		20.48%		20.74%		21.00%	

Pmax Tolerance 0/+3% STC:AM1.5 1000W/m<sup>2</sup> 25°C NOCT:AM1.5 800W/m<sup>2</sup> 20°C 1m/s Measurement uncertainty:±3%

## Mechanical Data

Cell Type	P type Mono-crystalline
Cell Arrangement	108(6x18)
Module Dimensions	1722x1134x30mm
Weight	21.2kg
Module Structure	Glass/Encapsulant/Backsheet
Glass Thickness	3.2mm
PV Module Classification	Class II
Junction Box Rating	IP68
Cables	4mm <sup>2</sup> /1100mm or Customized Length
Connector Type	PV-ZH202B or MC4 (1000V) PV-ZH202B or MC4-EVO 2A (1500V)

## Packaging




Pallet Dimensions	1770×1140×1250mm
Container	40'HQ
Pieces per Pallet	36
Pieces per Container	936

## Temperature Characteristics

Nominal Operating Cell Temperature(NOCT)	42±3°C
Temperature Coefficient of Isc	+0.0448%/°C
Temperature Coefficient of Voc	-0.246%/°C
Temperature Coefficient of Pmax	-0.330%/°C

## Maximum Ratings

Operating Temperature	-40°C to+85°C	Maximum Series Fuse Rating	25A
Maximum Load Capacity	Snow 5400Pa/Wind 2400Pa	Number of Diodes	3
Maximum System Voltage	1000V/1500V DC(IEC)	Fire Rating Class	Class C

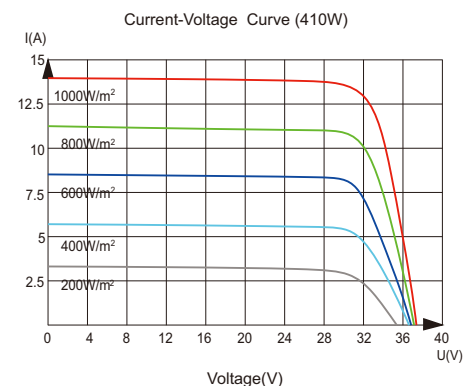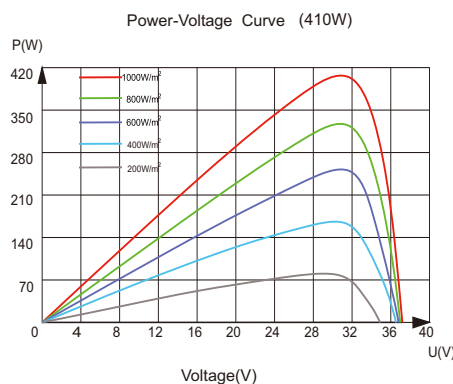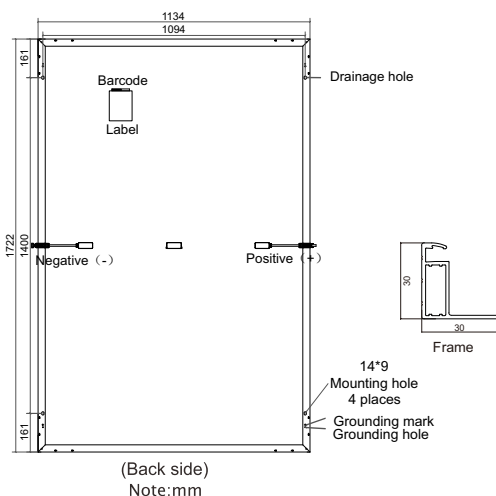

**Statement:** Due to technological progress, product parameters will be adjusted accordingly; When signing the contract, the latest data of the company shall prevail.